




Profil P5XL

The P5XL has been developed to last against the continued increase of mechanisation in the vineyard. With a narrow cross section and increased steel fold on the rear of the post, the P5XL can pass easily through any type of mechanisation. This makes it easier to use all common harvest, pruning and under vine cleaning machines, reducing the risk of impact against the post. The large lateral walls of the post ensure exceptional ground stability and resistance to side pressure.

Our posts are available in the following variants :

- Hot dipped galvanised (HDG)
- Pre-galvanised strip (Z275)
- Zinc-Aluminium-Magnesium (ZM310)
- Weatherproof steel

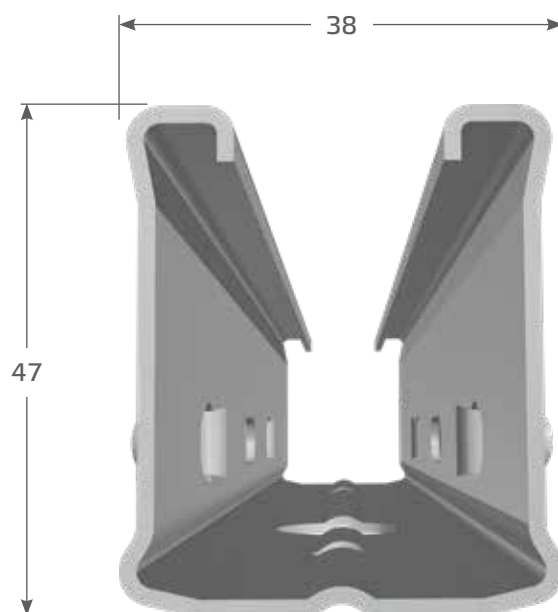

P5XL Configuration table

| Hooks | Post length [cm] | |
|--------------------------------|--------------------------|---------|
| | 250-270 | 280-300 |
| | Number of pairs of hooks | |
| 10 mm short tapered S-hook | 1 | 1 |
| 10 mm long tapered S-hook | 7 | 7 |
| 10 mm R-hook | 7 | 7 |
| 14 mm Combi-hook | 7 | 7 |
| 10 mm short tapered S-hook | 4 | 4 |
| 8 mm S-hook | 1 | 3 |
| 8 mm Double hook | 1 | 1 |
| Total number of pairs of hooks | 14 | 16 |

Installation depth table


| Post length [cm] | Recommended installation depth [cm] |
|------------------|-------------------------------------|
| 250 | 70-75 |
| 260 | 80 |
| 270 | 85 |
| 280 | 90 |
| 300 | 95 |

For intermediate posts the profile opening should always be facing the slope.



3-hook system: the right hook for each application

P5XL Profile

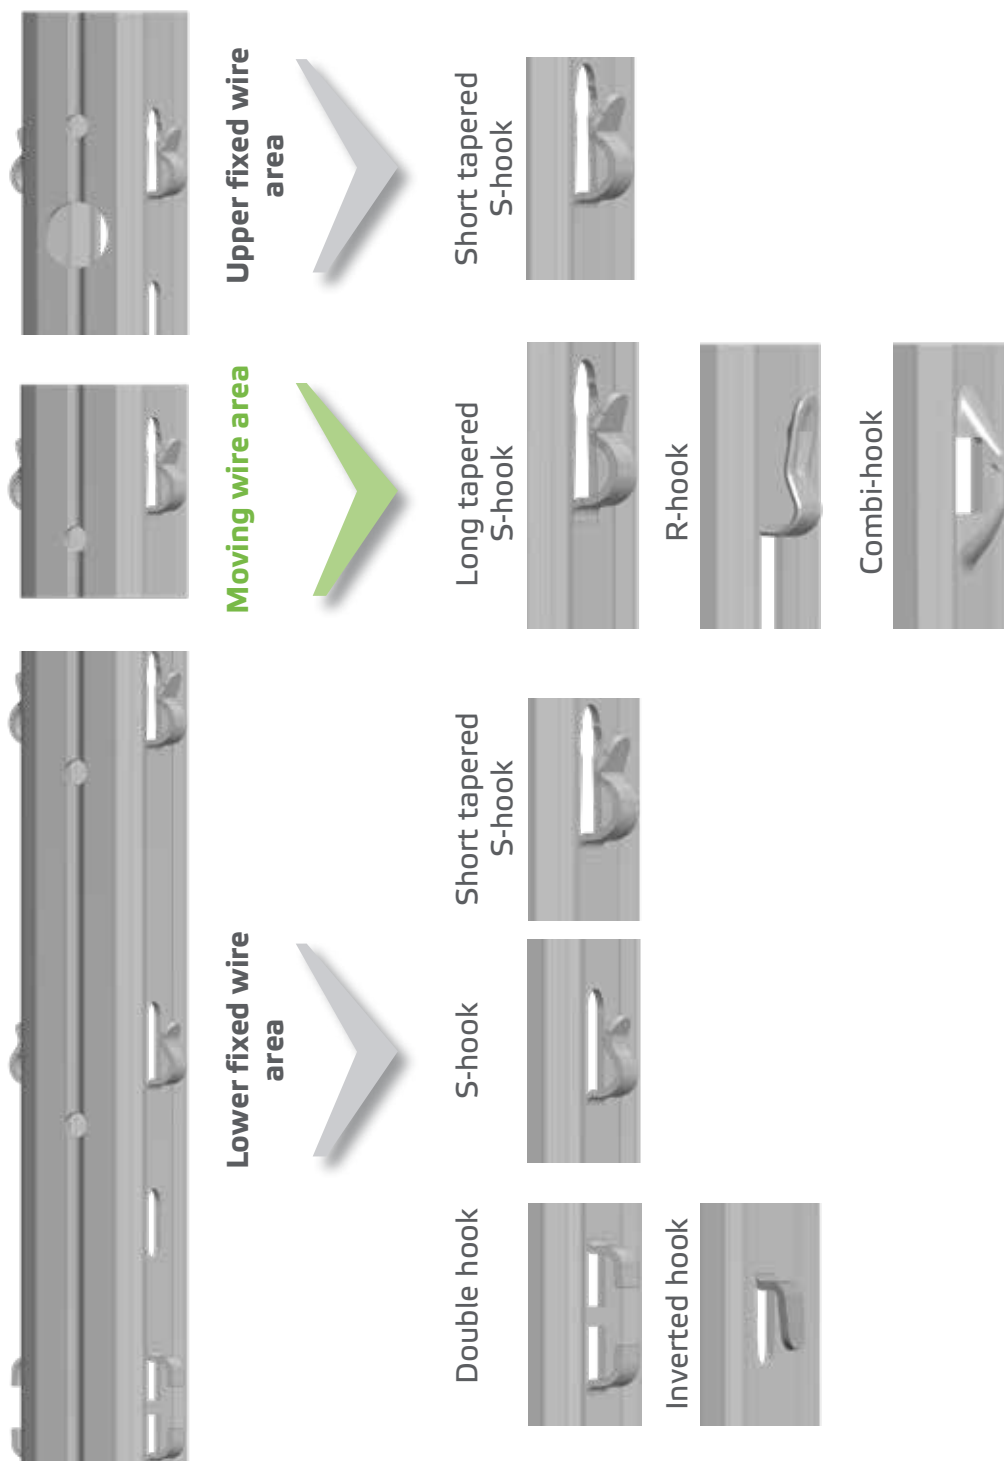

- Narrow width profile for ease of use with mechanisation.
- Increased rear fold to protect against mechanical impacts.

- Large side wall for lateral stability.
- Robust and reassuring profile
- Available in R, S and Combi Hook.

Profil Alsace S.A.S.
Zone Industrielle Kiesweg
F-67630 Niederlauterbach

Tel.: +33 (0) 3 88 94 68 88
Fax: +33 (0) 3 88 94 68 85
E-Mail: info@profilalsace.com
www.profilalsace.com



Website



Youtube