



P5 Profile


The dimensions of the P5 mean that it can be used for intermediate and high trellis heights of up to 1.85 m above the ground.

The standard design is made with a distance of 10 cm between hooks and the patented tapered S-hook. It is also available in the new R-hook as well as with the Combi-hook.

Custom designs are available on request.

Our posts are available in the following variants :

- Hot dipped galvanised (HDG)
- Pre-galvanised strip (Z275)
- Zinc-Aluminium-Magnesium (ZM310)
- Weatherproof steel

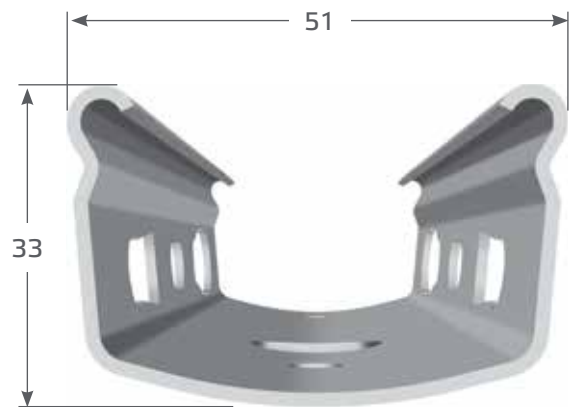

P5 Configuration table

Hooks	Post length [cm]		
	180-190	200-220	240-270
	Number of pairs of hooks		
10 mm short tapered S-hook	1	1	1
10 mm long tapered S-hook	5	6	7
10 mm R-hook	5	6	7
14 mm Combi-hook	5	6	7
10 mm short tapered S-hook	2	3	4
8 mm S-hook	1	1	1
8 mm Double hook	1	1	1
Total number of pairs of hooks	10	12	14

P5 installation depth table

Post length [cm]	Recommended installation depth [cm]
180	55
200	60-65
220	65
240	70
250	75
260	80
270	85

For intermediate posts the profile opening should always be facing the slope.



P5 Profile

3-hook system: the right hook for each application



Upper fixed wire area



Short tapered S-hook



Moving wire area



Long tapered S-hook



R-hook



Combi-hook



Lower fixed wire area



S-hook



Double hook



Short tapered S-hook

