




P5X Profile

The P5X was developed for use in difficult ground. Due to the almost square shape and compact profile, it is very stable and robust, whilst maintaining flexibility for use with all types of vineyard machinery.

The standard version of the P5X is manufactured with the R-hook. S-hooks, Combi-hooks and double hooks options are also available, as with all our models.

Our posts are available in the following variants :

- Hot dipped galvanised (HDG)
- Pre-galvanised strip (Z275)
- Zinc-Aluminium-Magnesium (ZM310)
- Weatherproof steel

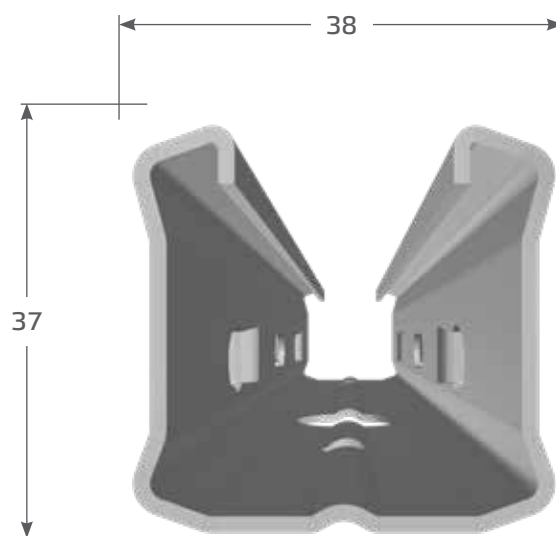

P5X Configuration table

Hooks	Post length [cm]		
	180-190	200-220	240-270
	Number of pairs of hooks		
10 mm short tapered S-hook	1	1	1
10 mm long tapered S-hook	5	6	7
10 mm R-hook	5	6	7
14 mm Combi-hook	5	6	7
10 mm short tapered S-hook	2	3	4
8 mm S-hook	1	1	1
8 mm Double hook	1	1	1
Total number of pairs of hooks	10	12	14

P5X Installation depth table


Post length [cm]	Recommended installation depth [cm]
180	55
200	60-65
220	65
240	70
250	75
260	80
270	85

For intermediate posts the profile opening should always be facing the slope.



P5X Profile

3-hook system: the right hook for each application

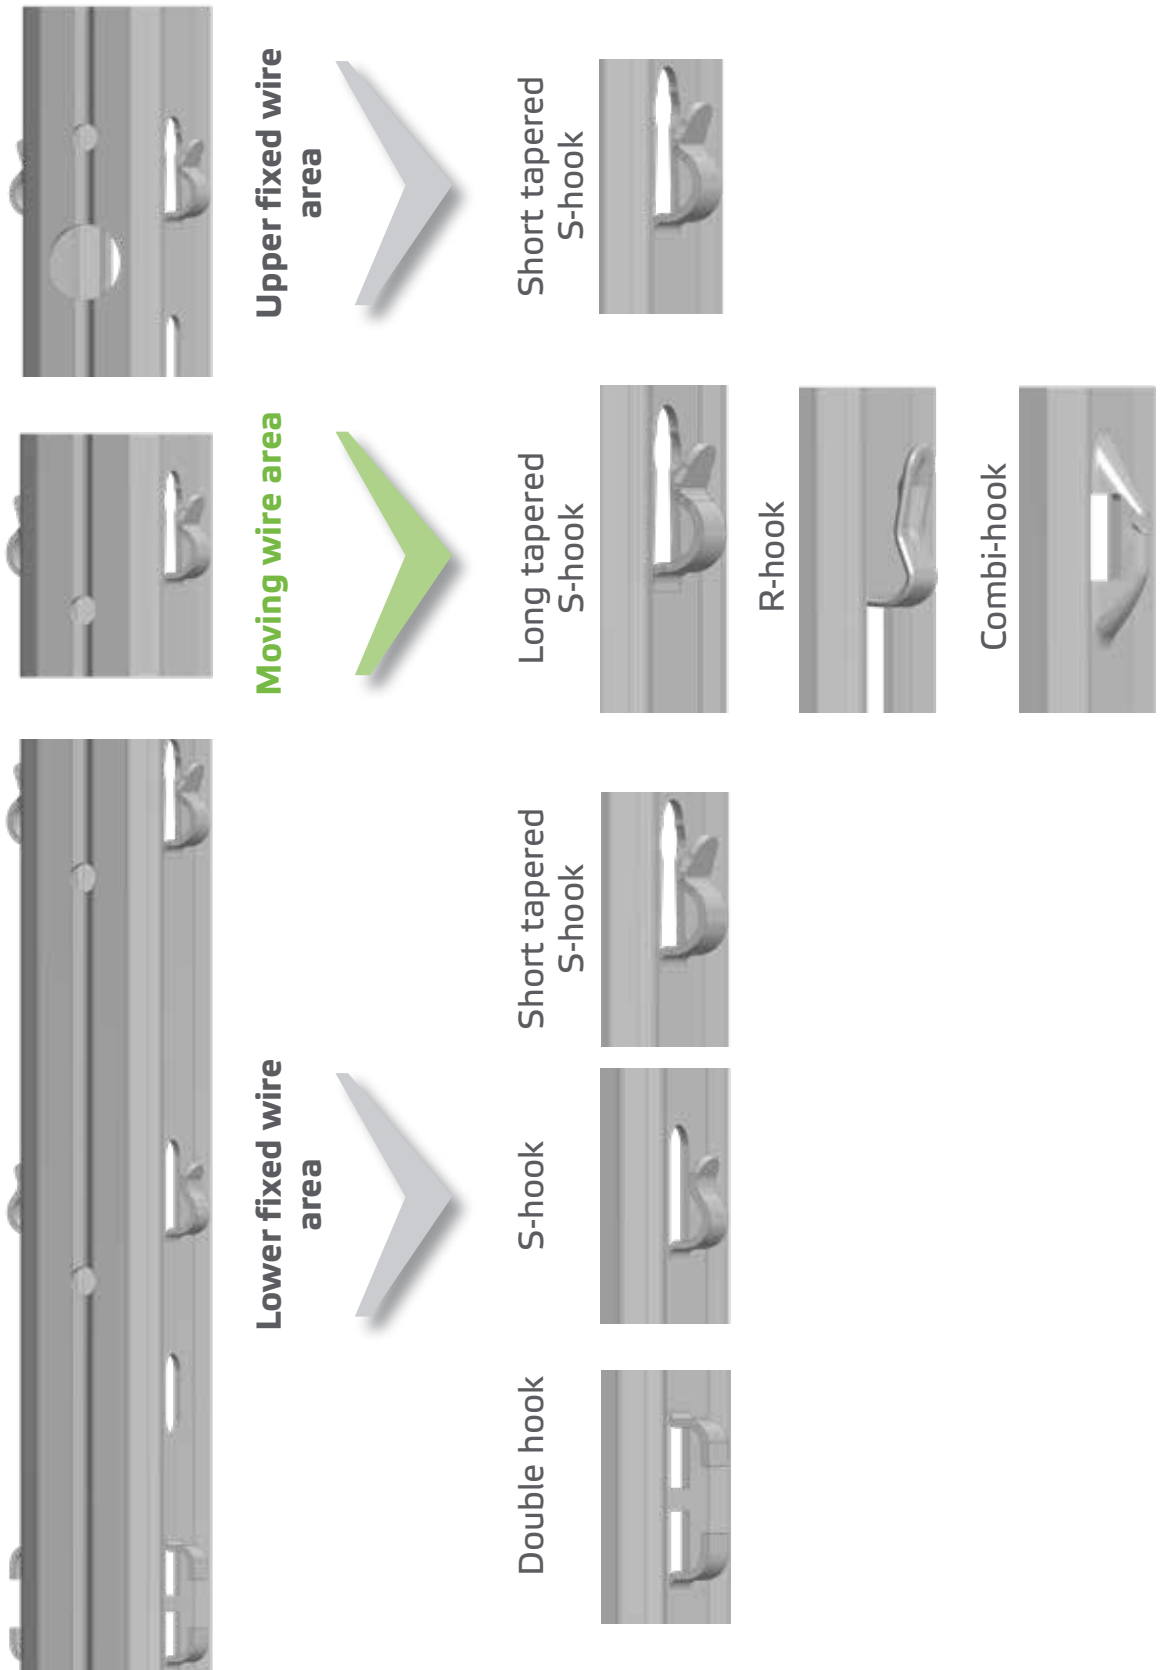

Profil Alsace S.A.S.
 Zone Industrielle Kiesweg
 F-67630 Niederlauterbach

Tel.: +33 (0) 3 88 94 68 88
 Fax: +33 (0) 3 88 94 68 85
 E-Mail: info@profilalsace.com
www.profilalsace.com



Website



Youtube